


TrynEx International, LLC, 531 Ajax Drive, Madison Heights, MI 48071-2429 • www.snowexproducts.com

January 15, 2019 Lit. No. 93026, Rev. 01

Wheeled Pusher Shovel

PARTS LIST

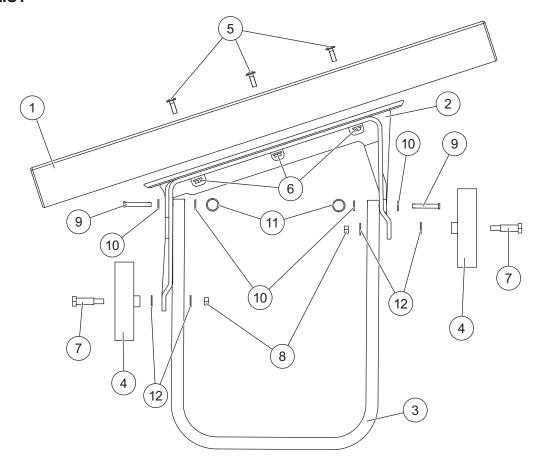

| SP-36WL Wheeled Pusher Shovel | | | | | | | |
|-------------------------------|-------|-----|-----------------------------------|--------|-------|-----|---------------------|
| tem | Part | Qty | Description | Item | Part | Qty | Description |
| 1 | 87721 | 1 | 36" Wheeled Pusher Blade, Yellow | 4 | 87722 | 2 | Wheel |
| 2 | 87725 | 1 | Caster Bracket | ns | 87724 | 1 | Hardware Kit |
| 3 | 87723 | 1 | Wheeled Pusher Handle, Black | İ | | | |
| | | | 87724 Ha | rdware | Kit | | |
| 5 | | 3 | 5/16-18 x 1 Carriage Bolt | 9 | | 2 | 5/16 x 2 Clevis Pin |
| 6 | | 3 | 5/16-18 Hex Locknut | 10 | | 4 | 1/4 Flat Washer |
| 7 | | 2 | 1/2 x 1-1/2 x 3/8-16 Hex Shoulder | 11 | | 2 | Split Ring |
| | | | Bolt | 12 | | 4 | 5/16 Flat Washer |
| 8 | | 2 | 3/8 Hex Locknut | | | | |

ASSEMBLY INSTRUCTIONS

A CAUTION

Read this document before assembling the wheeled pusher shovel.

Attach Blade to Frame

Insert three 5/16" x 1" carriage bolts through the face of the blade into the frame. Be sure to align the square portion of the bolt head with the square holes in the blade. Secure with three 5/16" locknuts and tighten so that the smooth heads of the bolts are embedded into the face of the blade.

NOTE: Locknuts require more pressure to install than regular nuts. Be sure to tighten each one completely to ensure proper performance.

Attach Handle to Frame

Insert two 5/16" x 2" clevis pins and two 1/4" flat washers through the outside of the frame and into the handle. Secure with two 1/4" flat washers and two split rings.

Attach Wheels to Frame

Attach the wheels to the plastic frame only. Insert two 1/2" x 1-1/2" shoulder bolts through the outside of each wheel and into the frame with a 5/16" flat washer on each side of the frame. Attach a 3/8" locknut to each shoulder bolt and tighten thoroughly.

Copyright © 2019 Douglas Dynamics, LLC. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of TrynEx International, LLC. Authorization to photocopy items for internal or personal use by TrynEx International outlets or product owner is granted.

TrynEx International reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. TrynEx International offers a limited warranty for all accessories. See separately printed page for this important information. The following is a registered (®) trademark of Douglas Dynamics, LLC: SnowEx®.

Printed in U.S.A.