

## Bypass Reconfiguration Kit

### Liqui Maxx™ Spray Systems

#### INSTALLATION INSTRUCTIONS

##### ⚠ CAUTION

Read this document before installing the Bypass Reconfiguration Kit.


##### ⚠ CAUTION

Use standard methods and practices when attaching liquid spray system and installing accessories, including proper personal protective safety equipment.

##### ⚠ CAUTION

Disconnect electric and/or hydraulic power and tag out if required before servicing or performing maintenance.


1. Remove the plastic wrap surrounding the product and hammer the top of the crate upward to remove.

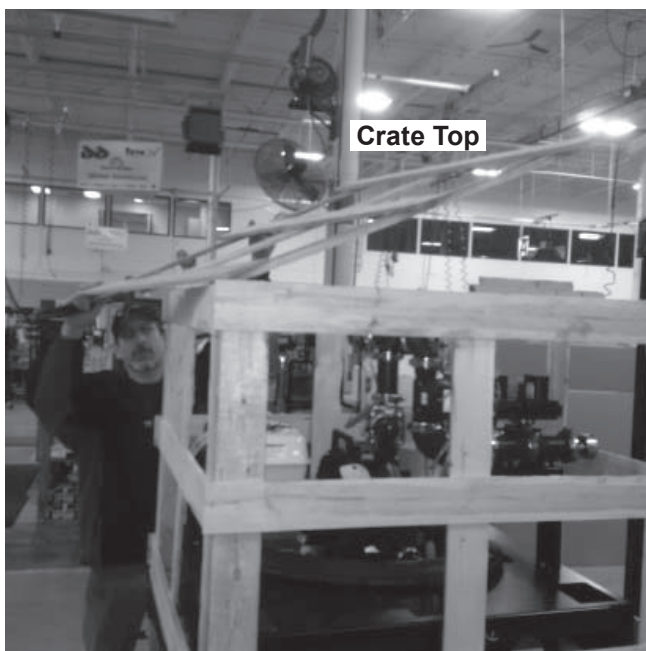


2. Remove the tee fitting with straight hose barb at the top of the unit.




3. Remove the plug from the tee fitting.

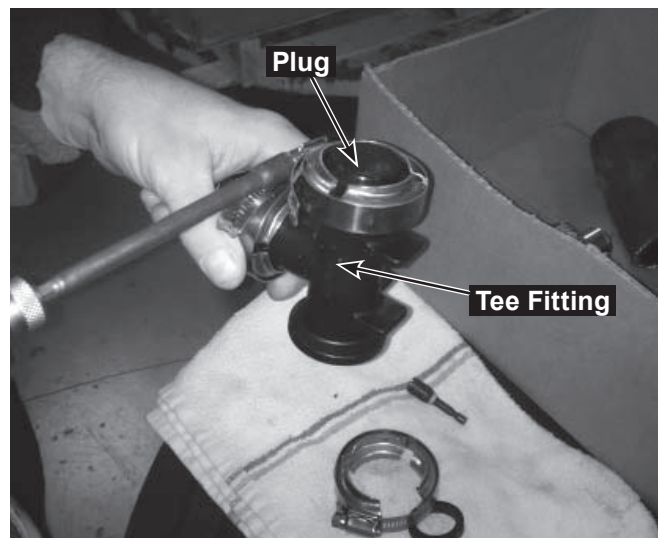


4. Install the plug on the large tee fitting remaining at the top of the unit.

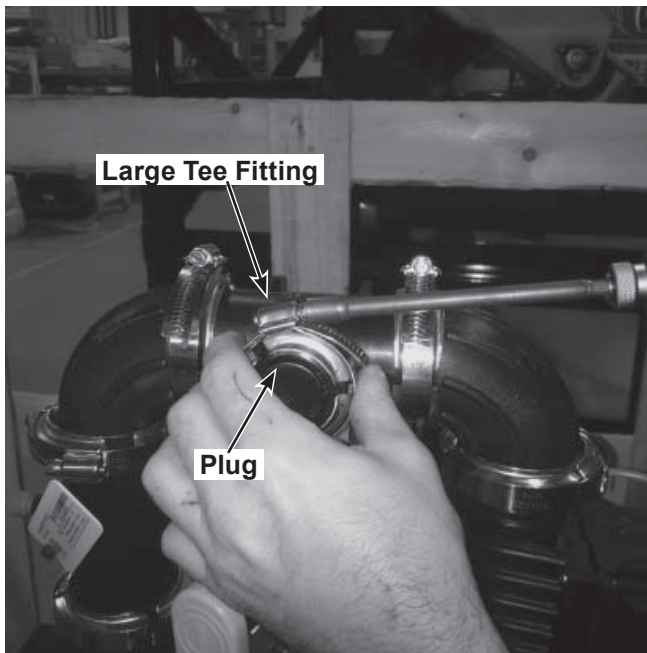


5. Remove the tee fitting located directly above the pump. This may require loosening additional clamps.

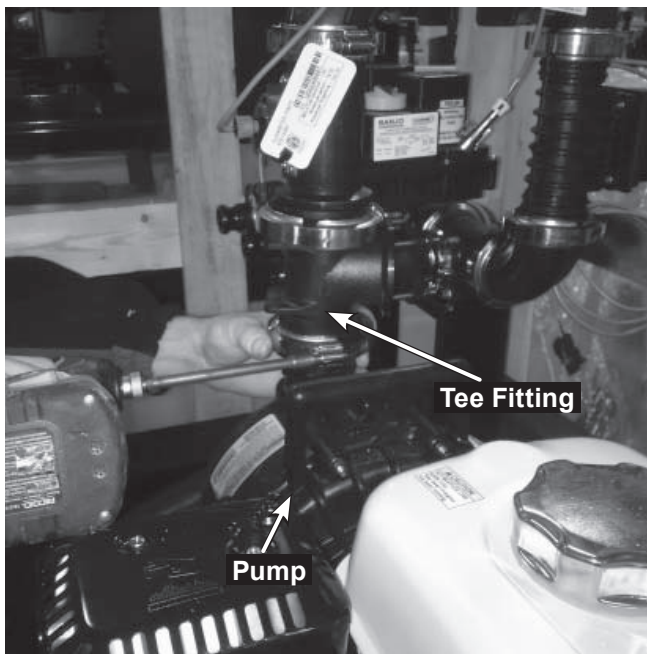


6. Remove the valve from the tee fitting just removed.
7. Install the valve into the new cross fitting provided in the reconfiguration kit.

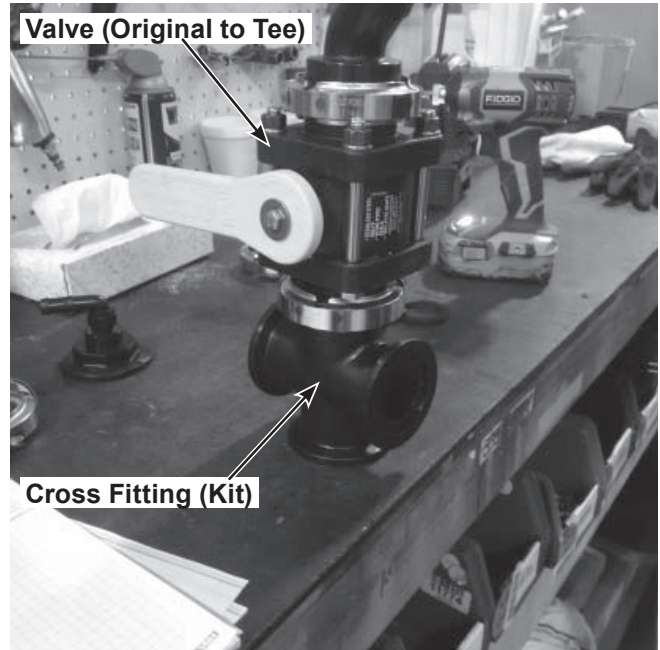


8. Install the 90° hose barb and adapter fitting from the reconfiguration kit into the opposite end of the cross fitting.

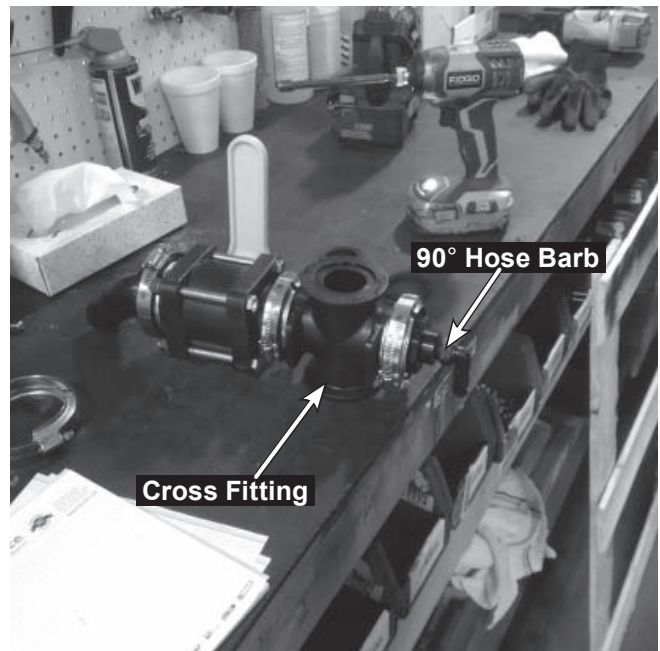

9. Install the cross fitting above the pump in place of the old tee fitting. This may require loosening additional clamps.

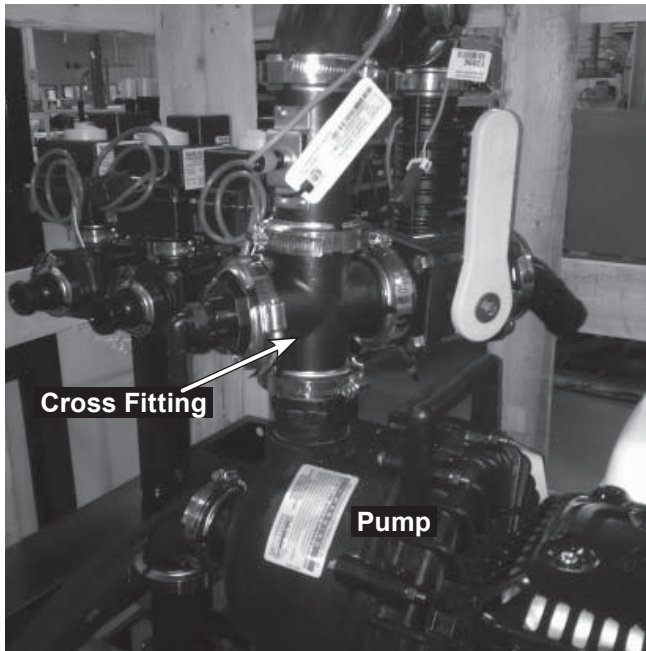

10. Tighten all clamps.

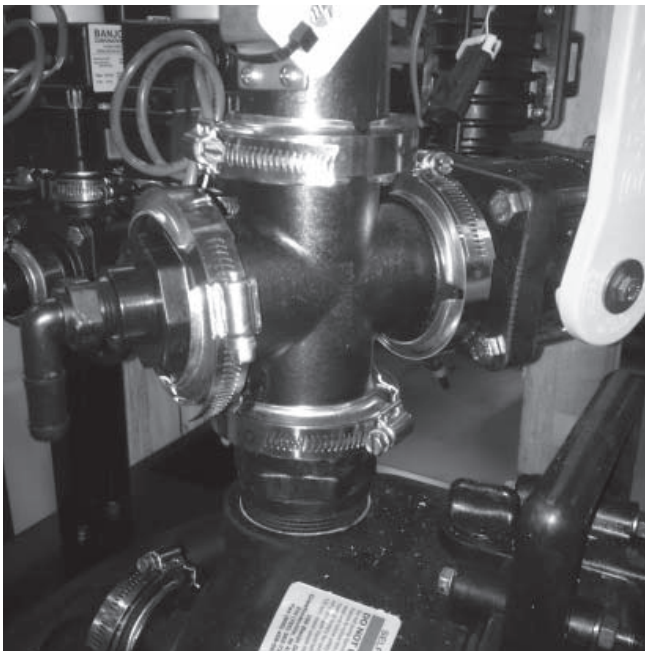

Copyright © 2016 Douglas Dynamics, LLC. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film or other distribution and storage media, without the written consent of TrynEx International, LLC. Authorization to photocopy items for internal or personal use by TrynEx International, LLC outlets or snowplow owner is granted.

TrynEx International, LLC reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. TrynEx International, LLC or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. TrynEx International, LLC offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) and unregistered (™) trademarks of Douglas Dynamics, LLC: Liqui Maxx™, SnowEx®.

**Printed in U.S.A.**

---