

Back Drag Edge RD and HD Series Snowplows

INSTALLATION INSTRUCTIONS

⚠ WARNING

Do not exceed GVWR or GAWR, including blade and ballast. The rating label is found on the driver-side vehicle door cornerpost.

⚠ CAUTION

Read this document before installing the back drag edge.


⚠ CAUTION

Use standard methods and practices when attaching snowplow and installing accessories, including proper personal protective safety equipment.

⚠ CAUTION

See your SnowEx[®] outlet/website for specific vehicle application recommendations before installation. The Power Match selection system has specific vehicle and snowplow requirements.

1. Park the vehicle on a smooth, level, hard surface, such as concrete. Raise the blade, then turn the control OFF.
2. From the front of the blade assembly, place jack stands under the blade.
3. Turn the control ON and lower the blade so the blade rests securely on the jack stands. Turn the control OFF. Turn the vehicle ignition to the "OFF" position and remove the key.
4. Remove and discard the original carriage bolts and locknuts that secure the cutting edge to the blade.
5. Position the back drag edge between the cutting edge and blade as shown. Secure both the cutting edge and back drag edge to the blade with the carriage bolts, washers and locknuts from the bolt kit. Place washers on carriage bolts between locknuts and blade.
6. Torque fasteners to 150 ft-lb.
7. Turn the vehicle ignition and the control to the ON position. Raise the blade slightly from the jack stands. Turn the control OFF, and remove the jack stands.
8. Stand 8' clear of the blade, and lower the blade to the ground.

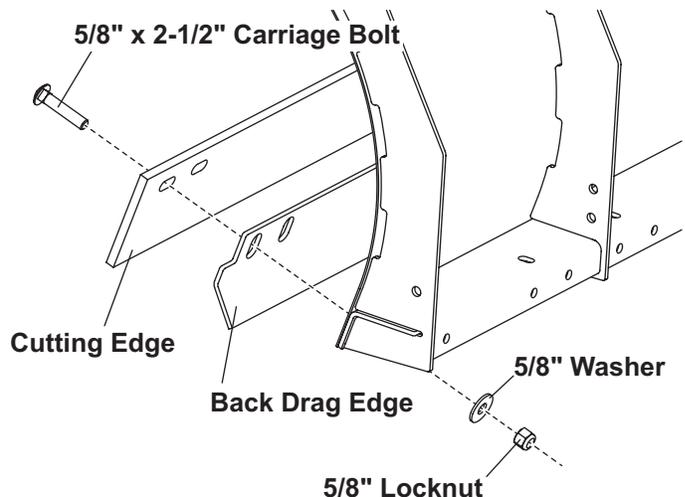

Copyright © 2015 Douglas Dynamics, LLC. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film or other distribution and storage media, without the written consent of TrynEx International, LLC. Authorization to photocopy items for internal or personal use by TrynEx International, LLC outlets or snowplow owner is granted.

TrynEx International, LLC reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. TrynEx International, LLC or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. TrynEx International, LLC offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) trademarks of Douglas Dynamics, LLC: Automatixx®, SnowEx®.

Printed in U.S.A.
